



P-58 L700 U-MIMO



Tehnično navodilo
Tehnično uputstvo
Technical manual




50000 0319 030

Montaža : Glejte sliko antene. Vse strešne antene morajo biti pravilno ozemljene.
Montaža: Pogledajte sliko antene. Sve krovne antene moraju biti propisno uzemljene.
Assembly : See a picture of antenna. All outdoor antennas must be fixed and connected properly.

Pridržujemo si pravico do sprememb. Pridržavamo pravo promjene. Subject to change without notice.

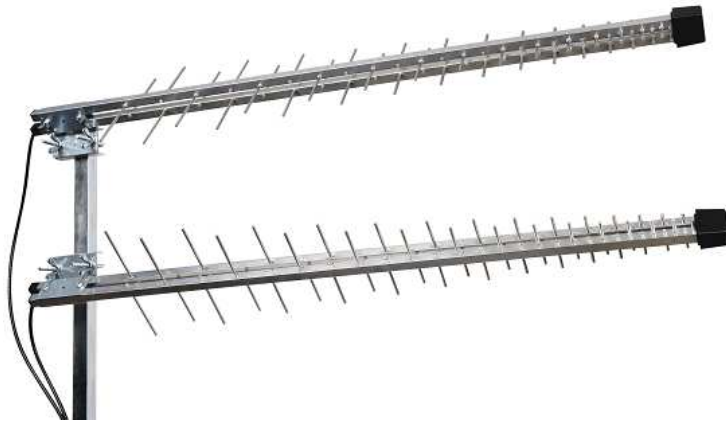

oddajnik transmitter

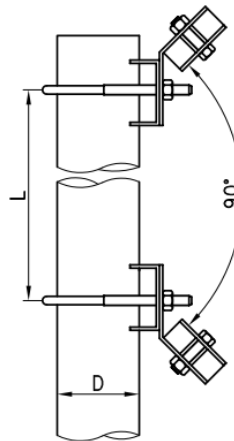

Optimalna razdalja med antenama	Optimum distance between the antennas	L = 75 cm
Minimalna razdalja med antenama	Minimum distance between the antennas	L = 50 cm
Maks. premer pritrditvenega droga	Max. diameter of support pipe	D = 55 mm

Tehnični podatki / Tehnički podaci / Technical data :

Impedanca	Impedance	50 Ω
Število elementov	Number of elements	58
Kabel	Cable	POPE H155
Dolžina kabla	Cable length	10 m
Konektor	Connector	SMA moški / SMA male
Frekvenčni pas	Frequency range	LTE 700+800 (4G) 698 – 862 MHz GSM 900 880 – 960 MHz DCS 1800 1710 – 1880 MHz UMTS (3G) 1920 – 2170 MHz Wi-Fi (WLAN) 2401 – 2495 MHz LTE 2,6 GHz 2500 – 2690 MHz
Maks. Moč priključitve	Max. power connection	50 Watt
Dobitek	Gain	9 – 11 dB(i)
Razmerje naprej – nazaj	Front – back ratio	23 dB
Širina glavnega lista	Beam width	Horiz. 54° (@ 1800 MHz) Vert. 46° (@ 1800 MHz)
Polarizacija	Polarization	vertikalna / vertical
VSWR	VSWR	< 1,6 : 1
Dolžina antene	Antenna length	107 cm
Maks. premer pritrditvenega droga	Max. diameter of support pipe	55 mm

